

Subject	OPERATIONAL DCS STATUS REPORT INCL. EDCP IMPLEMENTATION PLANS + STATUS OF IMPLEMENTATION OF BEST PRACTICES
In response to CGMS action/recommendation	
HLPP reference	
Executive Summary	<p>This document addresses the current status and technical specifications of the Russian data collection system and related future plans. The DCS is established to provide collection and distribution of meteorological data from the remote areas and to support natural hazards warning system. Roshydromet has developed and deployed the national DCS based on geostationary meteorological satellites Electro-L No.2, No.3 and No.4 (14.5W, 76E, 165.8E) with a backup option via Luch-5 series communication satellite and highly elliptical orbit satellites Arctica-M No.1 and No.2. There are 696 DCPs currently deployed. DCPs are distributed all over the Russian territory, including 141 DCPs in hard-to-reach areas. The composition of the spacecraft constellation will be further revising with the end of geostationary Electro-L No.5 satellite testing.</p>
Action/Recommendation proposed	

1 INTRODUCTION

Russian data collection system (DCS) is established to provide satellite channels for meteorological data transmission from data collection platforms (DCPs) via meteorological satellites (backup option – via Luch-5 communication satellites).

The DCS was developed according to the international requirements of WMO and CGMS and has to provide transmission of the messages every 3 hours (standard synoptic hours), storm warnings at any time also.

2 TECHNICAL SPECIFICATIONS

DCS comprises of the network of DCPs at Roshydromet' observational sites, relay transponders at Russian satellites of Electro-L, Luch-5 and Arctica-M series, and ground reception stations at SRC Planeta satellite centers.

DCP signals are transmitting via geostationary meteorological satellites relay transponders at frequency ranges of 401.5-402.5 MHz (uplink) and 1696.5-1697.5 MHz (downlink), via highly elliptical orbit satellites relay transponders of 402-403 MHz (uplink) and 1697-1698MHz (downlink) with transmission rate of 100 or 1200 bps. The message size is up to 15 000 bit. The transmission time is synchronizing with GLONASS/GPS signals.

Russian DCS is developed for data transmission via geostationary meteorological satellites of Electro-L series (constellation of three spacecrafts to be located at 14.5W, 76E, and 165.8E) with backup option via communication satellites of Luch-5 series, and also highly elliptical orbit satellites of Arctica-M series (constellation of two spacecrafts),

The constellation of Electro-L geostationary satellites provides realtime coverage of the territory from about 75°S to about 75°N, with Arctica-M series satellites covering high Arctic latitudes (see Figure 1). Non-realtime coverage of the whole globe provides by polar low-orbit meteorological satellites of Meteor series (constellation of three spacecraft).

DCP can be equipped with traditional (one-way) or two-way communication equipment (terminal). Two-way terminal is designed to increase the reliability of message transmission and remote terminal control. For organize reverse channel the relay transponders specified above are used.

For this moment, Roshydromet applies one-way terminals to work via geostationary and highly elliptical orbit satellites. Two-way terminals are placed in hard-to reach areas only and work via Arctica-M satellites.

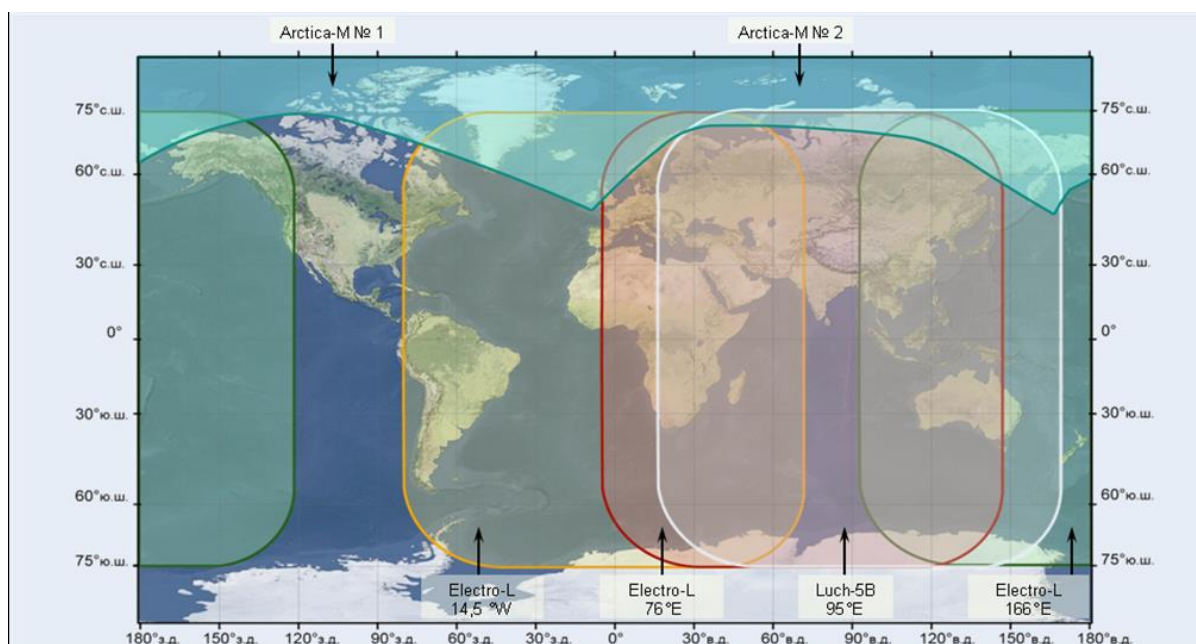


Figure 1: The coverage of Russian geostationary and highly elliptical orbit satellites.

3 CURRENT STATUS

Roshydromet has developed and deployed the national DCS based on three geostationary meteorological satellites of Electro-L series, with a backup option via communication satellite of Luch series and two highly elliptical orbit satellites of Arctica-M series.

As shown in Figure 2 messages transmitted from DCPs to Electro-L (14.5W, 76E, 165.8E) and Luch-5B (95E) are relayed to the European (Moscow region), Siberian (Novosibirsk) and Far Eastern (Khabarovsk) satellite centers of SRC Planeta. Both Arctica-M satellites also are relayed to same three centers.

There are 698 DCPs currently deployed (April 2026). DCPs are distributed all over the territory of Russia, including 140 DCPs in hard-to reach areas. The national DCS has a reliability of 99.8 % based on the number of messages successfully received.

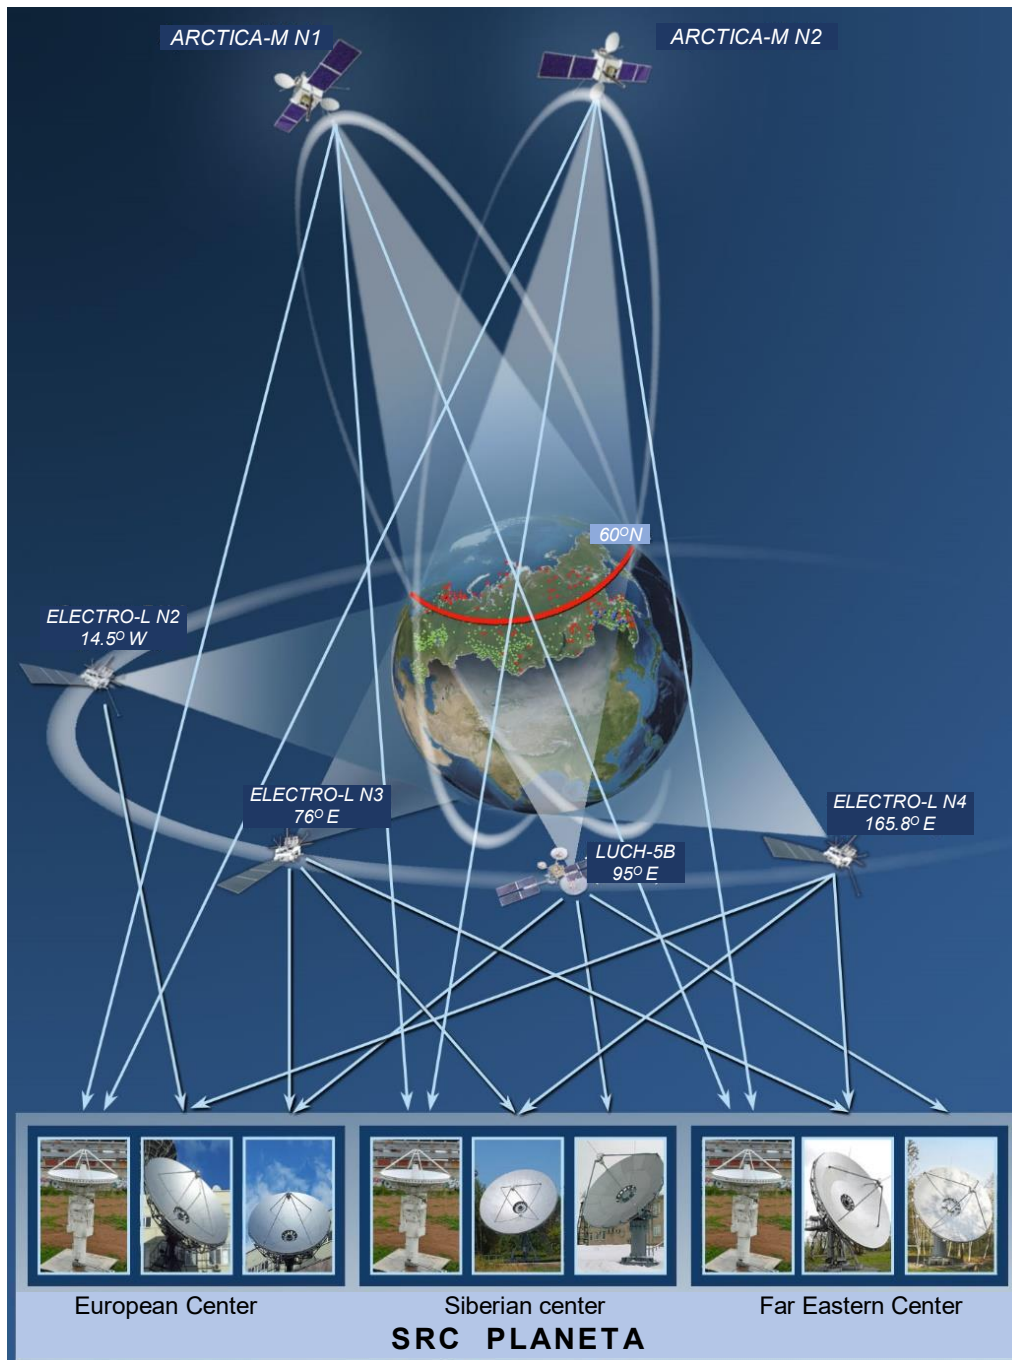


Figure 2: Russian DCS functional diagram.

4 DEVELOPMENT PERSPECTIVES

Roshydromet's plan is to increase the number of DCP with one and two-way terminals used, primarily in the Arctic and Far Eastern regions.